



- Breathable, wind and waterproof with taped seams.
- Anti-static, acid-resistant and flame-retardant.
- Dirt repellent.
- Higher back provides both support and warmth.
- Adjustable kneepad pockets so kneepads can be optimally placed on the knee.
- Co-certified for use with MASCOT kneepad type SHORT or LONG, as the kneepad pocket is height-adjustable.

Technical info

Two-toned. Fluorescent and with reflective tape. Dirt resistant. Anti-static, acid-protective and flame retardant. Protects from electric arcs and occasional welding arcs. Breathable, wind and waterproof. Taped seams. Lining of quilt. The removable braces are made from strong elastic Belt loops. D-ring. The waistband is higher at the back, to better protect against the cold. Fly with zip. Front pockets. Back pockets with reinforcement, flap and hidden press studs. Thigh pocket with flap and hidden press studs. Phone thigh pocket. Reinforced ruler pocket with flap. Adjustable knee pad pockets with flap and top access. Zip with storm flap on outside of legs. We recommend 00418-100, 00718-100, 50451-916 and 20118-915 kneepads for this model. Co-certified together with kneepad type SHORT or LONG in accordance with EN 14404.

User



13892-217 Winter Trousers

quilted lining - removable braces - waterproof - multi-protective
 MASCOT® MULTISAFE



S	M	L	XL	2XL	3XL	4XL
---	---	---	----	-----	-----	-----

Main material/upper material


55% modacrylic/39% cotton/5% polyamid/1% carbon fibres
 320 g/m²



Twill/Ripstop.

Industrial care category B3

Certifications

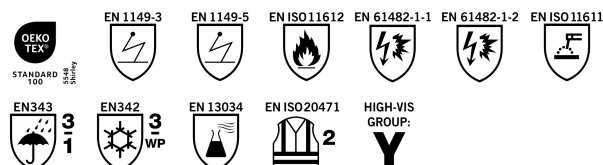

- OEKO-TEX® STANDARD 100
- EN 1149-3
- EN 1149-5
- EN ISO 11612 (A1, A2, B1, C1, E1, F1)
- EN 61482-1-1 (ATPV - 24 cal/cm²)
- EN 61482-1-2 APC 2
- EN ISO 11611 - class 1 (A1 + A2)
- EN 343 3/1
- EN 342 3/WP (0.308 clo)
- EN 13034 (Type 6)
- EN ISO 20471 - class 2
- Hi-Vis Group Y

Logo

Due to the unique properties of the fabric, logo printing is only available through the use of specific transfer types. As this is a safety product, we strongly recommend that MASCOT affix the logo to reduce the risk of errors. Please contact customer service for further information.

The product is certified with a maximum logo area of 0,2600m². This approved area must not be exceeded. Logos respectively on the front or back of the product, can only constitute a maximum of 50% of the total approved logo area in order to maintain the EN ISO 20471-certification. Note: The listed area is only a guide to how much space is available for logo placement. In order to maintain the product's hi-vis class

according to EN ISO 20471, the instructions on logo size must be observed.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further